

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 974 881 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

26.01.2000 Bulletin 2000/04

(51) Int Cl.7: G05B 19/042, G01R 33/54

(21) Application number: 99305592.0

(22) Date of filing: 14.07.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 22.07.1998 US 120920

(71) Applicant: GENERAL ELECTRIC COMPANY

Schenectady, NY 12345 (US)

(72) Inventors:

- McKinnon, Graeme Colin  
Hartland, Wisconsin 53029 (US)

• Tan, Quing

Waukesha, Wisconsin 53186 (US)

• Licato, Paul Edgar

Wauwatosa, Wisconsin 53213 (US)

• Ploetz, Lawrence Edward

Brookfield, Wisconsin 53005 (US)

(74) Representative: Pedder, James Cuthbert et al

GE London Patent Operation,

Essex House,

12/13 Essex Street

London WC2R 3AA (GB)

## (54) Modular time masking sequence programming for imaging system

(57) A technique is described for programming multiple axes (56, 58, 60, 62, 64) or channels of a system, such as an MRI system. Modular component time masks (118, 120, 122, 124) are defined including information for activity on at least one axis and a time boundary (126, 128) for execution of the activity. The modular components may be stored in a library, and assembled to define desired control sequences (54). Activity may

include pulse sequences for coils (18, 20) in the imaging system. The modular components facilitate definition of complex multi-axis control sequences while respecting inherent physical constraints of the system. Time optimized control sequences (54) may be developed from the modular components by reference to beginning and ending times (126, 128) of a series of components, or to anchor time points (78, 92, 102) associated with the components.

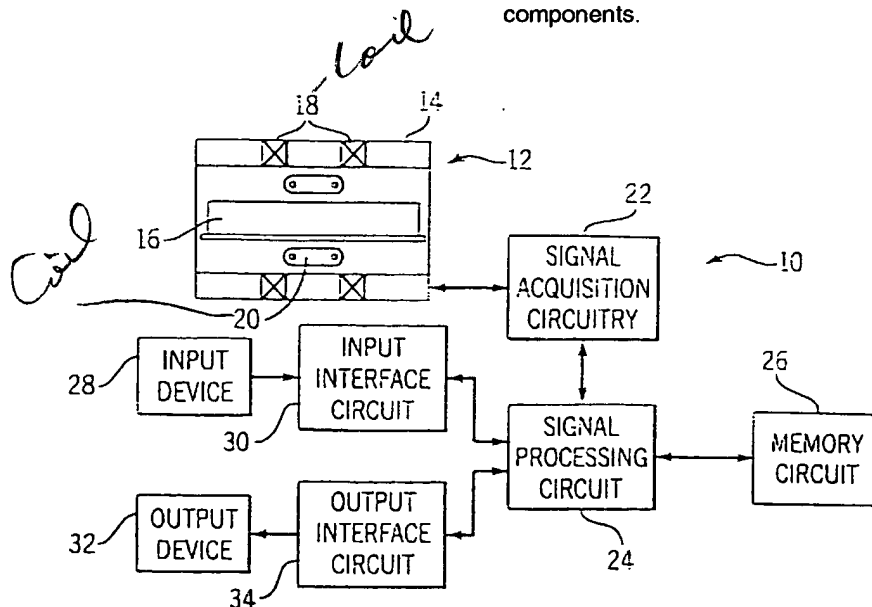


FIG. 1

## Description

**[0001]** The present invention relates to imaging systems, such as magnetic resonance imaging systems used in medical applications. More particularly, the invention relates to a technique for programming sequences of events, including controlled parameters for multiple components or axes of an imaging system, useful in acquiring and processing data representative of images in such systems.

**[0002]** A range of modalities are available for acquiring and constructing images of physical subjects. In the medical imaging field, such modalities include magnetic resonance imaging systems, commonly referred to generically MRI systems. MRI systems generally include magnetic field-generating coils which can be carefully controlled to excite gyromagnetic material in a subject of interest. Proper control of a plurality of magnetic field-generating coils, such as field gradient coils, excitation coils, and so forth, permit the gathering of an increasing number of image types, allowing an attending physician or radiologist to concentrate on specific features of interest in the subject. During complex data acquisition sequences in such systems, a large number of precisely controlled pulses may be generated and coordinated with one another to produce the desired fields, and to sense emissions from the subject, typically produced by the excited gyromagnetic material of internal static or dynamic tissues.

**[0003]** In a number of imaging modalities, a large amount of data is acquired through a series of programmed steps. The data acquisition sequences are typically pre-established in software routines stored in a controlling computer system. The attending physician or radiologist selects desired image types or protocols and sets certain parameters employed by the controlling computer during the imaging process. Thereafter, the computer executes a series of steps, typically in repetition, to acquire the image data. In MRI processes, for example, magnetic and radio frequency pulses are typically emitted for a plurality of axes to excite specific volumes of tissue. The pulses are interlaced with acquisition sequences wherein emissions from the tissue are sensed and encoded for later filtering and image reconstruction.

**[0004]** Although at a high level the user of such imaging systems may simply select a particular image type or configuration, the selected configuration includes a large number of parameter control steps which are not necessarily apparent to the user. In MRI systems these include specific axis pulse sequences, such as for orienting magnetic fields, exciting tissues, and acquiring data. Each of these sequences, in turn, includes selections of a variety of parameters, such as pulse duration, pulse amplitude, timing between pulses, and timing of emission detection. Moreover, the image sequences may include coordinated pulse trains which follow one another in a logical manner consistent with the physical

constraints of the material being imaged and the modality employed. For example, MRI applications may include pulse trains intended to excite specific locations within a subject, orient fields for slice selection, flip directions of rotation of gyromagnetic material, and so forth. Finally, periods between activity may be programmed, such as to permit settling of equipment or to allow time for processing of signals.

**[0005]** In general, programmers designing specific imaging sequences attempt to coordinate the many parameters of such multi-axis activity in such a way as to reduce the overall image data acquisition time, while avoiding unwanted interactions between the segments of the acquisition sequence which might result in a less useful image. However, while manual configuration of image acquisition sequences has provided a useful array of imaging techniques, it is not without drawbacks. For example, as multi-axis control in MRI and other imaging systems becomes increasingly complex, so does the configuration of the control sequence for the axes and the coordination between sequences of activity on the axes. Moreover, further optimization of image data acquisition is often hampered by the need to foresee complex interactions between axis activity. Failure to anticipate such interactions can result in control of specific parameters in ways that do not render the desired image data or which do not permit appropriate time for data collection or processing.

**[0006]** There is a need, therefore, for an improved technique for defining control sequences in imaging systems, such as MRI systems. In particular, there is a need for a technique for coordinating and optimizing pulse sequences and other activities on multiple axes in an imaging system, and which inherently respects the physics of the image data acquisition process, and avoids unwanted interactions between activities on multiple axes.

**[0007]** According to a first aspect of the invention, there is provided a method for configuring a control sequence in an imaging system including a plurality of independently controllable subsystems, and control circuitry for commanding activities of the subsystems, the method comprising the steps of defining a first logical component module including instructions for executing a first activity of at least one subsystem and a second time boundary for execution of the first activity; defining a second logical component module including instructions for executing a second activity of at least one subsystem and a second time boundary for execution of the second activity; and assembling the first and second logical component modules into a control sequence; and storing the control sequence in a memory circuit.

**[0008]** Preferably, the subsystems include at least two coil sets for producing magnetic fields in a subject of interest, and wherein at least one of the first and second logical component modules includes instructions for commanding operation of a coil set for more than one axis.

**[0009]** At least one of the first and second logical com-

ponent modules may include instructions for producing a desired pulse in at least a first of the coil sets and may include a time mask for preventing pulse in at least a second of the coil sets.

**[0010]** A trailing edge of the time boundary of the first logical component module may coincide with a leading edge of the time boundary of the second logical component module.

**[0011]** At least one of the first and second logical component modules may include a time mask for acquisition of image data via a signal detection subsystem.

**[0012]** According to a second aspect of the invention, there is provided a method for controlling an imaging system, the imaging system including data acquisition circuitry for generating pixel signals representative of discrete pixels in an image, control circuitry configured to command operation of the data acquisition circuitry, and signal processing circuitry for processing the pixel signals, the method comprising the steps of commanding a first activity of the imaging system as defined by a first logical component module, the first logical component module including instructions for controlling a first set of parameters in the first activity and a first time boundary for execution of the first activity; and commanding a second activity of the imaging system as defined by a second logical component module, the second logical component module including instructions for controlling a second set of parameters in the second activity and a second time boundary for execution of the second activity.

**[0013]** The data acquisition circuitry may include a plurality of independently controllable axes, and wherein the first and second activities may each include at least one desired pulse for at least one of the axes.

**[0014]** At least one of the first and the second logical component modules may include a time mask of an additional axis for which no activity is desired during the respective first or second time boundary. The first and second logical component modules may be stored in a memory circuit coupled to the control circuitry.

**[0015]** The first and second logical component modules may be mutually time adjacent, such that a trailing edge of the first time boundary coincides in time with a leading edge of the second time boundary.

**[0016]** According to a third aspect of the invention, there is provided a method for time optimizing a control sequence in an imaging system, the imaging system including data acquisition circuitry for generating pixel signals representative of discrete pixels in an image, control circuitry configured to command operation of the data acquisition circuitry, and signal processing circuitry for processing the pixel signals, the method comprising the steps of defining a plurality of command modules, each command module including instructions for commanding an activity of at least one independently controllable component of the imaging system and a time boundary for execution of the activity; assembling at least two of the command modules into a control sequence wherein

a trailing edge of a time boundary of the first command module establishes an earliest location for a leading edge of a time boundary of a second command module; and storing the control sequence in a memory circuit.

**[0017]** At least one of the command modules may include instructions for activities on at least two independently controllable components of the imaging system.

**[0018]** The time boundary of at least one of the command modules may include a first portion for a first component and a second portion for a second component, the second portion extending over a longer duration than the first portion.

**[0019]** At least one of the command modules may include instructions for pulsing a coil set to produce a magnetic field in a subject of interest.

**[0020]** At least one of the command modules may include instructions for detecting signals representative of pixel data.

**[0021]** A portion of a time boundary for at least one of the command modules may be operator adjustable. The method may include the step of graphically representing each command module in an operator station such that time boundaries for each command module are defined by graphical boundaries having dimensions representative of duration for activity commanded by the command modules.

**[0022]** According to a fourth aspect of the invention, there is provided an imaging system for producing an image of a subject of interest, the imaging system comprising a data acquisition subsystem for producing signals representative of the image; a control circuit coupled to the data acquisition subsystem, the control circuit being configured to command activities of components of the data acquisition subsystem in accordance with a plurality of logical command modules, each module defining an activity of at least one component of the data acquisition subsystem and a time boundary defining a time period for the activity; and a memory circuit for storing the logical command modules in a predefined sequence.

**[0023]** Preferably, components of the data acquisition subsystem include coil sets for a plurality of axes, and at least one command module may include instructions for activities of at least two axes within a time boundary.

**[0024]** At least one of the command modules may include instructions for generating pulsed emissions from at least one component. At least one command module includes a time mask preventing activity of at least one component within a time boundary. At least two of the command modules may be temporally juxtaposed such that a trailing edge of a time boundary for a first command module is coincident with a leading edge of a second command module.

**[0025]** According to a fifth aspect of the invention, there is provided a magnetic resonance imaging system comprising a plurality of coil sets for generating magnetic fields in a subject of interest and for detecting emissions from the subject for reconstruction into an image;

a controller coupled to the coil sets and configured to apply pulse sequences to the coil sets to generate the magnetic fields ant to detect the missions in accordance with a plurality of command modules assembled into a pulse sequence routine, each command module defining an activity for at least one coil set and a time boundary for the activity; and a memory circuit coupled to the controller for storing the command modules.

[0026] At least one of the command modules may define activities for a plurality of coil sets and the pulse sequence routine may be time optimized by juxtaposition of time boundaries for at least two of the command modules.

[0027] The invention also includes an image produced by one of the control sequences above described and by the above described method.

[0028] Thus, the invention provides a technique for controlling an imaging system designed to respond to these needs. The technique is applicable to a variety of imaging modalities, and is particularly well suited to multi-axis control of MRI and similar systems. The technique allows image acquisition sequence definition based on modules of activity, such as multi-axis pulse sequences, data acquisition sequences, and so forth. The activities on the axes are defined by limits or boundaries of the modules, particularly time boundaries, such that the modules can be assembled into combinations which inherently respect the physical constraints of the imaging system, subject, and signal processing circuitry. The system designer can thus optimize control of the system parameters by building a data acquisition sequence based upon the modules. The modules may be represented graphically, further facilitating assembly and optimization of desired control sequences.

[0029] In an exemplary implementation a plurality of modules are defined for controlling activity of at least one subsystem or axis of the imaging system. Each module defines controlled parameters and a time frame within which the parameters are controlled. Modules may define multi-parameter control, such as for more than one axis in a multi-axis system, and time frames may be different for the controlled axes. The modules may be defined graphically for presentation on a computer work station or the like. The modules are assembled into sequences by reference to the controlled parameters and the time frames. Graphically, the modules may be juxtaposed to formulate the sequences and to respect inherent constraints of the physical system, the system components and the subject being imaged. Time optimization is particularly facilitated by providing an intuitive reference for the programmer through the use of the modules for various subsequent sequences of interest.

[0030] The invention will now be described in greater detail, by way of example, with reference to the drawings, in which:-

aging system for generating images of a subject of interest;

Fig. 2 is a diagrammatical view of an exemplary discrete pixel image produced via the imaging system of Fig. 1;

Fig. 3 is a graphical representation of an exemplary sequence of pulses in an image acquisition sequence implemented by the system of Fig. 1;

Fig. 4 is a graphical representation of the pulse sequence of Fig. 3, divided into logical component groups;

Fig. 5 is a graphical representation of the component modules defined based upon the divisions of Fig. 4;

Fig. 6 is a graphical representation of the component modules of Fig. 5 assembled to produce a pulse sequence of the type shown in Fig. 3; and Figs. 7, 8, 9 and 10 are graphical representations of another exemplary pulse sequence and assembly of modular components for defining the pulse sequence.

[0031] Referring to Fig. 1, a magnetic resonance imaging system 10 is illustrated as including a scanner 12 coupled to circuitry for acquiring and processing discrete pixel data. Scanner 12 includes a support structure 14 in which a subject 16 may be placed for acquiring images representative of internal features, such as tissues, fluids and so forth. Scanner 12 includes an electromagnet arrangement 18 for producing an electromagnetic fields in a manner generally known in the art, typically including a primary field and a series of gradient fields. Excitation and sensing coils 20 are provided within scanner 12 for exciting gyromagnetic materials within subject 16 and for sensing emissions from the materials.

[0032] Signals sensed by coils 20 are encoded to provide digital values representative of the signals emitted at specific locations within the subject, and are transmitted to signal acquisition circuitry 22. Signal acquisition circuitry 22 also provides control signals for configuration and coordination of fields emitted by coils 20 during specific image acquisition sequences. Signal acquisition circuitry 22 transmits the encoded image signals to a signal processing circuit 24. Signal processing circuit 24 executes pre-established control logic routines stored within a memory circuit 26 to filter and condition the signals received from signal acquisition circuitry 22 to provide digital values representative of each pixel in the acquired image. These values are then stored in memory circuit 26 for subsequent processing and display.

[0033] Signal processing circuit 24 receives configuration and control commands from an input device 28 via an input interface circuit 30. Input device 28 will typically include an operator's station and keyboard for selectively inputting configuration parameters and for commanding specific image acquisition sequences. Signal processing circuit 24 is also coupled to an output

Fig. 1 is a diagrammatical view of a multi-axis im-

device 32 via an output interface circuit 34. Output device 32 will typically include a monitor or printer for generating reconstituted images based upon the image enhancement processing carried out by circuit 24.

[0034] It should be noted that, while in the present discussion reference is made to discrete pixel images generated by a magnetic resonance imaging system, the signal processing and sequence assembly techniques described herein are not limited to any particular imaging modality. Accordingly, these techniques may also be applied to image data acquired by x-ray systems, PET systems, and computer tomography systems, among others. It should also be noted that in the embodiment described, signal processing circuit 24, memory circuit 26, and input and output interface circuits 30 and 34 are included in a programmed digital computer. However, circuitry for carrying out the techniques described herein may be configured as appropriate coding in application-specific microprocessors, analog circuitry, or a combination of digital and analog circuitry.

[0035] Fig. 2 illustrates an exemplary discrete pixel image 36 produced via system 10. Image 36 is composed of a matrix of discrete pixels 38 disposed adjacent to one another in a series of rows 40 and columns 42. These rows and columns of pixels provide a pre-established matrix width 44 and matrix height 46. Typical matrix dimensions may include 256 X 256 pixels; 512 X 512 pixels; 1,024 X 1,024 pixels, and so forth. The particular image matrix size may be selected via input device 28 (see Fig. 1) and may vary depending upon such factors as the subject to be imaged and the resolution desired. As illustrated in Fig. 2, image 36 generally represents features of interest 48, illustrated as consisting of long, contiguous lines defined by adjacent pixels. Image 36 also includes textural or background regions 50 surrounding the features of interest, as well as detailed features 52 separate from the major features. Both the features and the surrounding regions represented in the image are defined by data collected in an acquisition sequence in which imaging system 10 generates a series of predetermined pulses programmed through definition of pulse sequence component modules and assembly of the modules as described in greater detail below.

[0036] Imaging system 10 executes pre-established control routines for creating a discrete pixel images of the type illustrated in Figure 2 by means of pre-established pulse sequences in coils of scanner 12. These control routines, executed by signal processing circuit 24 and signal acquisition circuit 22, are stored in memory circuit 26, and include instructions for creating or receiving pulses on various control axes or channels. In particular, magnetic resonance measurement used to generate images by system 10 is implemented by dynamic control of three orthogonal field gradient strengths, a radio frequency (RF) coil, as well as by other special coils (e.g., surface coils). In general, the pulse sequences employed during this process include descriptions of gradient pulses, RF pulses, acquisition pe-

riods, and so forth, including specifications for timing of the various pulses and periods, as well as definitions for the magnitude, profile, and frequency of the pulses. In the embodiment illustrated in the figures, programming code representing the pulse sequences is stored as tables of digital waveform values in memory circuit 26. These values, once accessed during an imaging sequence, are sent at predetermined time intervals to gradient field strength and RF amplifiers included in signal acquisition circuitry 22. In addition to the waveform values, a set of control signals are used to set exciter and receiver frequency and phase, to select data acquisition filtering configurations, to provide blanking signals for a receiver, to initiate data collection, and so forth. As will be appreciated by those skilled in the art, such pulse sequences and timing information are established in advance based upon the type of image data to be acquired, the physical characteristics of the subject and those of the controlled machine.

[0037] As illustrated in Figure 3, a pulse sequence for control of imaging system 10 will generally contain a number of pulses on several channels or axes. In the embodiment illustrated in Figure 3, a pulse sequence 54 includes pulses on a control axis 56, an RF axis 58, a Z gradient axis 60, a Y gradient axis 62, an X gradient axis 64, and an anchor axis 66. Activity on the various channels or axes may occur at different times, or may overlap in time, the execution time of the various pulses in Figure 3 being represented in the horizontal direction of each controlled axis. As will be appreciated by those skilled in the art, in an MR imaging process the logical or gradient axis may normally correspond to physical axes of the MR imaging scanner system, or may be translated to rotate the coordinate system in accordance with a desired slice orientation or image region. As will also be appreciated by those skilled in the art, optimization of a pulse sequence, such that imaging time is minimized, generally requires that the pulses comprising the sequence be spaced as closely together as possible, while respecting the physical constraints of the subject and imaging system. In conventional pulse sequence programming techniques, the multiple parameters of each pulse, including the pulse's amplitude, its start time, its completion time, its axis, and its relationship to other pulses, both on other axes and on the same axis, must all be set by the programmer. Failure to respect physical constraints of the system in this process lead to pulse sequences which are physically impossible at a machine level, or which produce meaningless or degraded data due to the physics of the subject or imaging system.

[0038] The present technique permits construction of pulse sequence components and their assembly into desired pulse sequences, with physical constraints of the system preferably being accounted for at a lowest or component level. Thus, a pulse sequence of the type illustrated in Figure 3 and described more fully below, may be constructed from logical pulse components by

assembly of such components without direct regard to physical constraints of the system. The technique is described below with reference to a pair of exemplary pulse sequences of the type that may be executed in an MRI system.

**[0039]** In the exemplary pulse sequence of Figure 3, pulses are created on all axes of the system for a fast spin echo (FSE) measurement in an MR system. In the illustrated pulse sequence, a pre-RF signal 68 is produced on the control axis, followed by a post-RF signal 70. During the period of the pre-RF signal 68, the system hardware initiates receiver blanking, and establishes the RF center frequency and phase. During the period of post-RF signal 70, the system disables the receiver blanking. Between signals 68 and 70 on the control axis, an RF sinc waveform 72 is generated on the RF axis. At the same time, a selective excitation pulse 74 is generated on the Z gradient axis. The selection pulse 74 is followed by a refocus pulse 76 of an opposite orientation, also on the Z gradient axis. The amplitude of the selection gradient will generally depend upon the RF pulse bandwidth, and the desired image slice thickness. The length of this gradient pulse will depend upon the RF sinc pulse length. The RF sinc waveform will generally be centered with respect to the selection gradient as discussed in greater detail below. This centering is insured by an anchor 78 which serves to define a point in time which is the basis for execution of the RF sinc and selection pulses, and the pulses which are required immediately before and after them.

**[0040]** A prephaser pulse 80 is generated on the X gradient axis in preparation for data acquisition. The area defined by this pulse will generally be a function of the readout component discussed below.

**[0041]** Also as shown in Figure 3, the pulse sequence 54 includes a series of pulses for selective refocusing of the fields used to acquire data for the desired image. Thus, a pre-RF signal 82 and a post-RF signal 84 are generated on the control axis. Between these two signals, an RF sinc pulse 86 is generated on the RF axis. Also, a pair of symmetric crusher gradients 88 as well as a selection gradient 90 are generated on the Z gradient axis. The amplitude of the selection gradient will generally depend upon the RF bandwidth of pulse 86, and on the desired image slice thickness. The length of the gradient pulses will generally be a function of the length of the RF sinc pulse 86. The RF sinc waveform 86 is centered with respect to the selection gradient 90, as indicated by anchor point 92 on the anchor axis. Like anchor point 78, anchor point 92 serves as the basis for locating or positioning the pulses in the selective refocusing group as discussed in greater detail below.

**[0042]** Following pulse 84 on the control axis, an acquisition control waveform 94 is produced on the control axis. A trapezoidal gradient pulse 96 is also produced on the Y gradient axis, the area of which will depend upon the desired field of view and upon the desired Y axis resolution. Also on the Y gradient axis, a rewinder

pulse 98 is generated of equal duration and amplitude as pulse 96, but opposition in direction. Finally, an FSE acquisition pulse 100 is generated on the X gradient axis immediately following phase encoding pulse 96, and immediately before rewinder pulse 98. The length of pulse 100 will generally depend upon the acquisition period, which is centered with respect to this trapezoidal gradient, as indicated by anchor 102.

**[0043]** By way of the example of Figure 3, it will be appreciated by those skilled in the art, that the various pulses in sequence 54 are defined and spaced in time with respect to one another to obtain meaningful image data. In general, this timing may be represented by time periods 104 and 106 which represent intervals between anchor points 78 and 92, and anchor points 92 and 102, respectively. Thus, the FSE pulse sequence consists of pulses for selective excitation of gyromagnetic material within subject 16, a pre-phaser pulse, selective refocusing pulses, and data acquisition components. In practice, a portion of the pulse sequence may be replicated a number of times as indicated by reference number 108 in Figure 3. Thus, the pulses included within the segment 108 may be reproduced depending upon the number of echoes to be acquired in the imaging sequence. In the example, the time between successive refocusing pulse sequences will generally be twice the time 104 separating the anchor points for the excitation and selection RF waveforms.

**[0044]** In accordance with the present technique, programming of parameters for a desired pulse sequence is facilitated by identification of logical relationships between the pulses and by definition of modular components including such pulses. Figure 4 illustrates the exemplary pulse sequence of Figure 3, divided into such logical groupings. Thus, as shown in Figure 4, a first grouping 110 is defined including pulses for selective excitation. Group 110 includes control axis pulses 68 and 70, as well as RF sinc pulse 72, selection and refocus pulses 74 and 76, and anchor 78 defining a center time for the RF sinc and selection gradient waveforms. A second pre-phaser group 112 is defined including a single pulse, namely, pre-phaser pulse 80 on the X gradient axis. A third group 114 includes pulses for selective refocusing. These include control pulses 82 and 84, RF sinc pulse 86, crusher gradient pulses 88, selection gradient 90, as well as anchor 92 defining the center of the RF sinc and gradient pulses. Finally, in the exemplary pulse sequence, a fourth group 116 is defined including FSE acquisition pulses.

**[0045]** Following identification of the pulse groups, modular component time masks are defined as illustrated in Figure 5. Each time mask preferably includes definitions of the pulses comprising the component, and may further define amplitudes, durations, and relative spacings between the pulses. It should be noted also that components as illustrated in Figure 5 may include time masking for axes other than those on which pulses are actually generated. This is particularly the case

where the image acquisition routine would call for one or more axes to remain without activity during certain of the pulses. Moreover, in addition to the axes illustrated and described herein, the components defined in this stage of the technique may include time masks for additional segments of the imaging system. For example, where signal processing circuitry requires additional time for executing filtering or computational functions, components may be defined which ensure sufficient time for such processing. Similarly, where elements of the imaging system require specific known settling times, data retrievable times, and the like, these may be additionally defined in the time masks.

**[0046]** Returning to Figure 5, time masks or pulse components are defined based upon the groupings identified in the pulse sequence. Thus, a selective excitation component 118 is defined including the pulses identified in the selective excitation group 110 of Figure 4. As noted above, this component also identifies a time mask for the X gradient and Y gradient axes during which no activity should be scheduled for these axes. A pre-phaser component 120 is also defined including only the pre-phaser pulse 80. As illustrated, due to the nature of the pre-phaser pulse, no constraint regarding activity on other axes is applicable. A selective refocusing component 122 is defined including the pulses identified in selective refocusing group 114 of Figure 4. As in the case of the selective excitation component, this component includes masking of the X gradient and Y gradient axes during the period of RF sinc pulse 86 and gradient selection pulse 90. Finally, an FSE acquisition component 124 is defined including the pulses identified in the FSE acquisition group 116 of Figure 4. This component includes time masking for waveforms on the Y and X gradient axes, and for reserving the RF and Z gradient axes. The FSE acquisition component 124 also includes acquisition control signal 94 which is offset with respect to the time mask for the RF and Z gradient axes. It should also be noted that each of the components associated with a time anchor maintains the respective anchor in the component definition. Thus, component 118 maintains time anchor 78, component 122 maintains anchor 92, and component 124 maintains anchor 102.

**[0047]** In a preferred embodiment, a multitude of modular pulse components may be generated and stored for future use in defining desired pulse sequences. Each component may not only define the types of pulses desired, as well as the axes of the pulses, but may define start times, end times, anchor points, amplitudes and directions of the individual pulses. Certain of these parameters may be adjustable by the programmer without the need to redefine a separate component. For example, as illustrated in Figure 5, selective excitation component 118 defines a start time or boundary 126 which begins for a certain axes at a time corresponding to the onset of waveform 72 and pulse 74, while beginning for other axes (i.e., control axis 56 in the embodiment illustrated) at an earlier time. Similarly, component 118 de-

finer an end time 128 which occurs at predetermined times spaced from beginning time 126 by the same or different durations for various axes. Thus, in the illustrated embodiment, end time 128 defines a time boundary for the Y gradient and X gradient axes corresponding to the ending time of RF sinc waveform 72 and pulse 74. The ending boundary of the time mask occurs at a later time for the control and Z gradient axes. In addition, each component may define the start and end times based upon spacings from an anchor point such as anchor point 78 in the case of component 118. The definitions of beginning and ending times, and their reference to one another as well as to anchor points 78 facilitate time placement and time optimization of the components. In addition to the timing boundaries for each component, each component may include alterable parameters such as pulse amplitudes, as indicated by amplitude 130 for selection gradient pulse 74.

**[0048]** Following definition of the modular pulse components, the components may be selected and assembled to define larger pulse sequences. Figure 6 illustrates the assemblage of the components defined in Figure 5, to reconstitute a pulse sequence of the type illustrated in Figure 3. Thus, as shown in Figure 6, in a first type of assembly, pulse components may be packed so as to optimize the overall time required for their execution. In particular, in the illustrated embodiment, pre-phaser component 120 is positioned immediately adjacent to selective excitation component 118. This may be accomplished by setting a beginning time for component 120 equal to or slightly after an ending time for component 118, such that the components share a time boundary as indicated at reference numeral 132. In this manner, components may be stacked in time to facilitate definition of beginning times for later components based upon ending times for preceding components. In a second type of assembly, components may be positioned relative to one another based upon time offsets between beginning and ending times, between beginning times, between ending times, or between anchor points. For example, as illustrated in Figure 6, component 122 is positioned with respect to component 118 by appropriate spacing of anchor point 92 from anchor point 78 as indicated by reference numeral 104. The resulting assembly produces time boundaries which are spaced apart from one another as indicated by reference numeral 134, but which, nevertheless, represent an optimal or desired spacing of the pulses of each component, such as for desired echo times. Thus, the technique offers the facility of predefining pulse components, which may be included in a library for anticipated future use. The technique also facilitates masking of both axes including pulse activity, as well as axes on which no activity should take place. Moreover, the technique facilitates time optimization and time placement of pulses, reducing the need for the pulse sequence programmer to independently define starting and ending times for the multiple pulses in particular pulse sequences independ-

ent of on another.

**[0049]** The component definition and time optimization features of the technique are further illustrated in another exemplary embodiment as shown in Figures 7, 8, 9, and 10. In those figures, rather than presenting the anchor points described above as a separate control axis or channel, these are represented in the figures as integral elements or parameters of the pulse components. As illustrated in Figure 7, in this exemplary embodiment, a slice selection component 136 is defined including time masks for control, RF, Z gradient, Y gradient and X gradient axes. The slice selection component 136 thus includes a control pulse 138, as well an RF pulse 140. A trapezoidal Z axis pulse 142 includes positive and negative amplitude waveforms in succession. Time masks are also defined by beginning time boundary 126 and ending time boundary 128 of the component preventing activity on the Y gradient and X gradient axes during the period of component 136. An anchor point 144 is defined for component 136 as a center point of RF waveform 140.

**[0050]** Also illustrated in Figure 7 is a phase encoding component 146. This component includes waveforms for the Y gradient axis. Because the component does not require time masking of any other controlled axis, it may be positioned in a time-optimized manner immediately subsequent to slice selection component 136, such that the two components share a time boundary as indicated at reference numeral 132.

**[0051]** Figure 8 illustrates an additional pulse component which may be predefined for combination with the components of Figure 7. The exemplary component of Figure 8 constitutes a readout acquisition component 148, including control pulses 150 and 152, and an X axis trapezoidal gradient waveform 154. Time boundaries for component 148 mask the RF, Z gradient and Y gradient axes during a portion of the X gradient waveform. In addition, an anchor point 156 is specified on a center point of a positive amplitude portion of waveform 154.

**[0052]** Figures 9 and 10 illustrate two different types of combination which can be made of the components of Figures 7 and 8. Specifically, Figure 9 represents a time-optimized combination of the components, such as may be generated by setting an echo time value equal to a minimum or zero. The combination results in compressing the components into a time-optimized compression, such that all time boundaries are immediately consecutive, and a time spacing between anchor points 144 and 156 becomes a minimum time as indicated at reference numeral 160. As shown in Figure 10, the components may be alternatively combined so as to space them a desired time delay from one another as indicated in the anchored configuration 162 of Figure 10. In this configuration, the same components are combined, but readout acquisition component 148, including its pulse sequences, is spaced from slice selection component 136 by a desired time period 164 as referenced between anchor points 144 and 156.

**[0053]** In addition to the functions described above for definition and combination of the individual pulse components, in a present embodiment, components may be recombined to form larger component or component combinations, which may be scheduled as blocks. Thus, returning to Figure 3, depending upon the number or echoes to be acquired in the exemplary pulse sequence, a series of pulses as indicated as reference numeral 108 may be replicated. The present technique facilitates such replication. For example, once the components are defined and assembled as illustrated in Figure 6, components 122 and 124 may be redefined into a composite component including all of the pulses of the two base components, and the relative time spacing therebetween. Thereafter, replication of the entire pulse sequence may be accomplished by placement of the combined components a desired number of times.

**[0054]** While reference is made in the foregoing description to pulse sequences to be implemented on multiple axes of a magnetic resonance imaging system, other imaging modalities may benefit from the component programming technique described above. Similarly, while certain exemplary pulse sequences are described above, in magnetic resonance imaging systems, a great variety of such pulses and pulse sequences may be programmed in the foregoing manner. For example, these may include slice selective excitation components, slice selective radio frequency components, readout and acquisition components, phase encoding components (including flow compensation and phase contrast, for example) spin preparation pulses, saturation pulses, and so forth.

## Claims

1. A method for configuring a control sequence (54) in an imaging system (10) including a plurality of independently controllable subsystems (56, 58, 60, 62, 64), and control circuitry for commanding activities of the subsystems, the method comprising the steps of.

defining a first logical component module (118) including instructions for executing a first activity (68, 70, 72, 74, 76) of at least one subsystem (56, 58, 60) and a first time boundary (128) for execution of the first activity;  
defining a second logical component module (120) including instructions for executing a second activity (80) of at least one subsystem (64) and a second time boundary for execution of the second activity; and  
assembling the first and second logical component modules into a control sequence; and  
storing the control sequence in a memory circuit (26).



2. The method of claim 1, wherein the subsystems include at least two coil sets (18) for producing magnetic fields in a subject of interest (16), and wherein at least one of the first and second logical component modules (118, 120) includes instructions for commanding operation of a coil set for more than one axis (56, 58, 60, 62). 5
3. The method of claim 1 or 2, wherein at least one of the first and second logical component modules (118, 120) includes instructions for producing a desired pulse in at least a first of the coil sets (56, 58, 60, 62). 10
4. The method of claim 3, wherein at least one of the first and second logical component modules (118, 120) includes a time mask for preventing pulse in at least a second of the coil sets (62). 15
5. The method of any preceding claim, wherein a trailing edge (128) of the time boundary of the first logical component module (118) coincides with a leading edge of the time boundary of the second logical component module (120). 20
6. The method of any preceding claim, wherein at least one of the first and second logical component modules (124) includes a time mask for acquisition of image data via a signal detection subsystem. 25

30

35

40

45

50

55

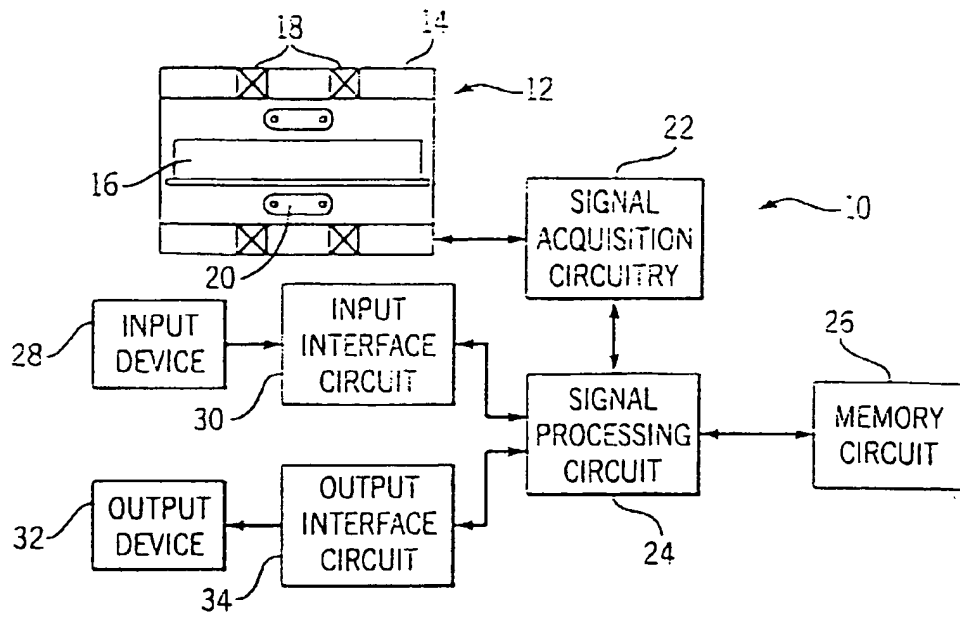


FIG. 1


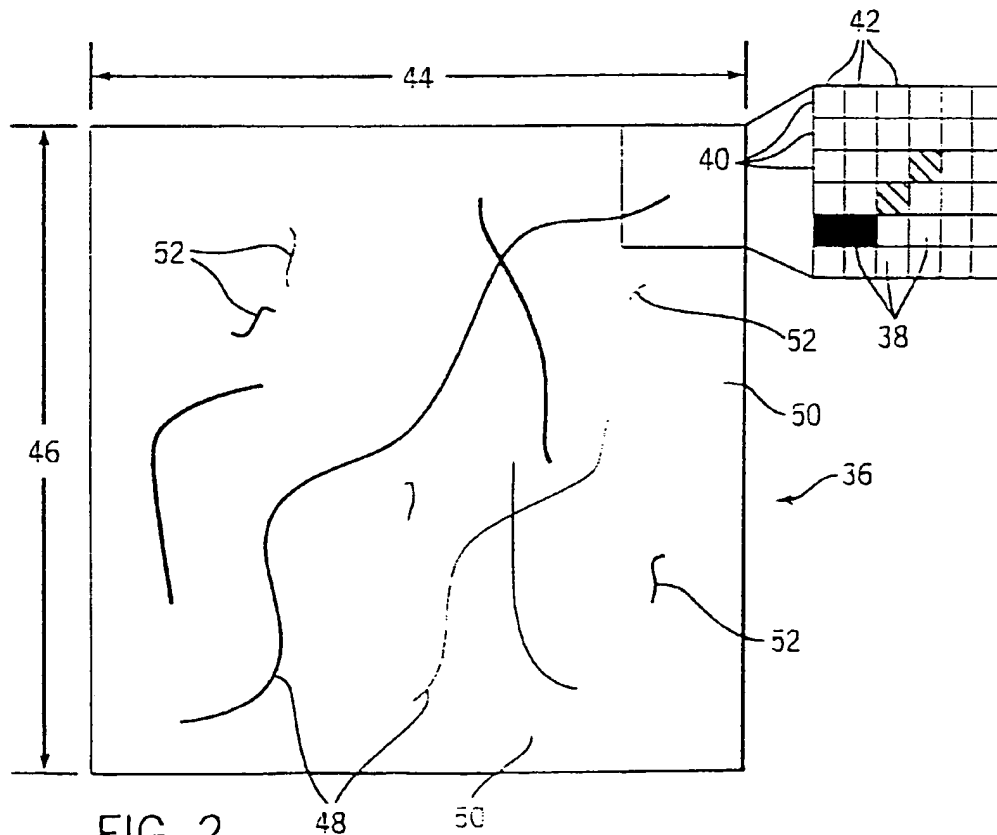



FIG. 2

FIG. 3

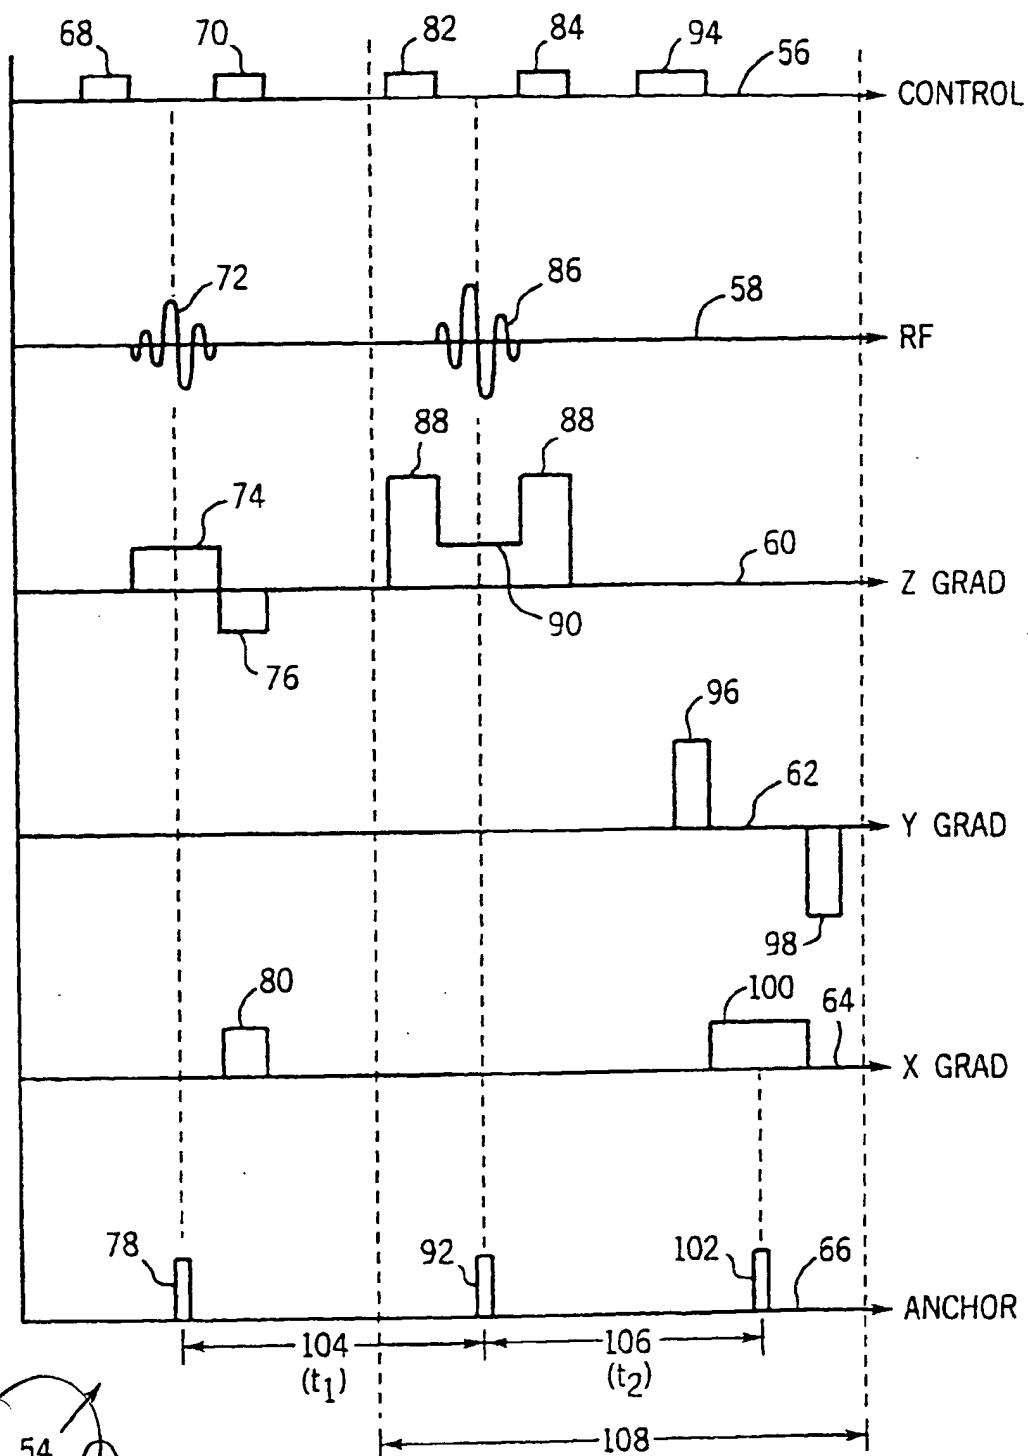

54  
Desired  
Control  
Sequence

FIG. 4

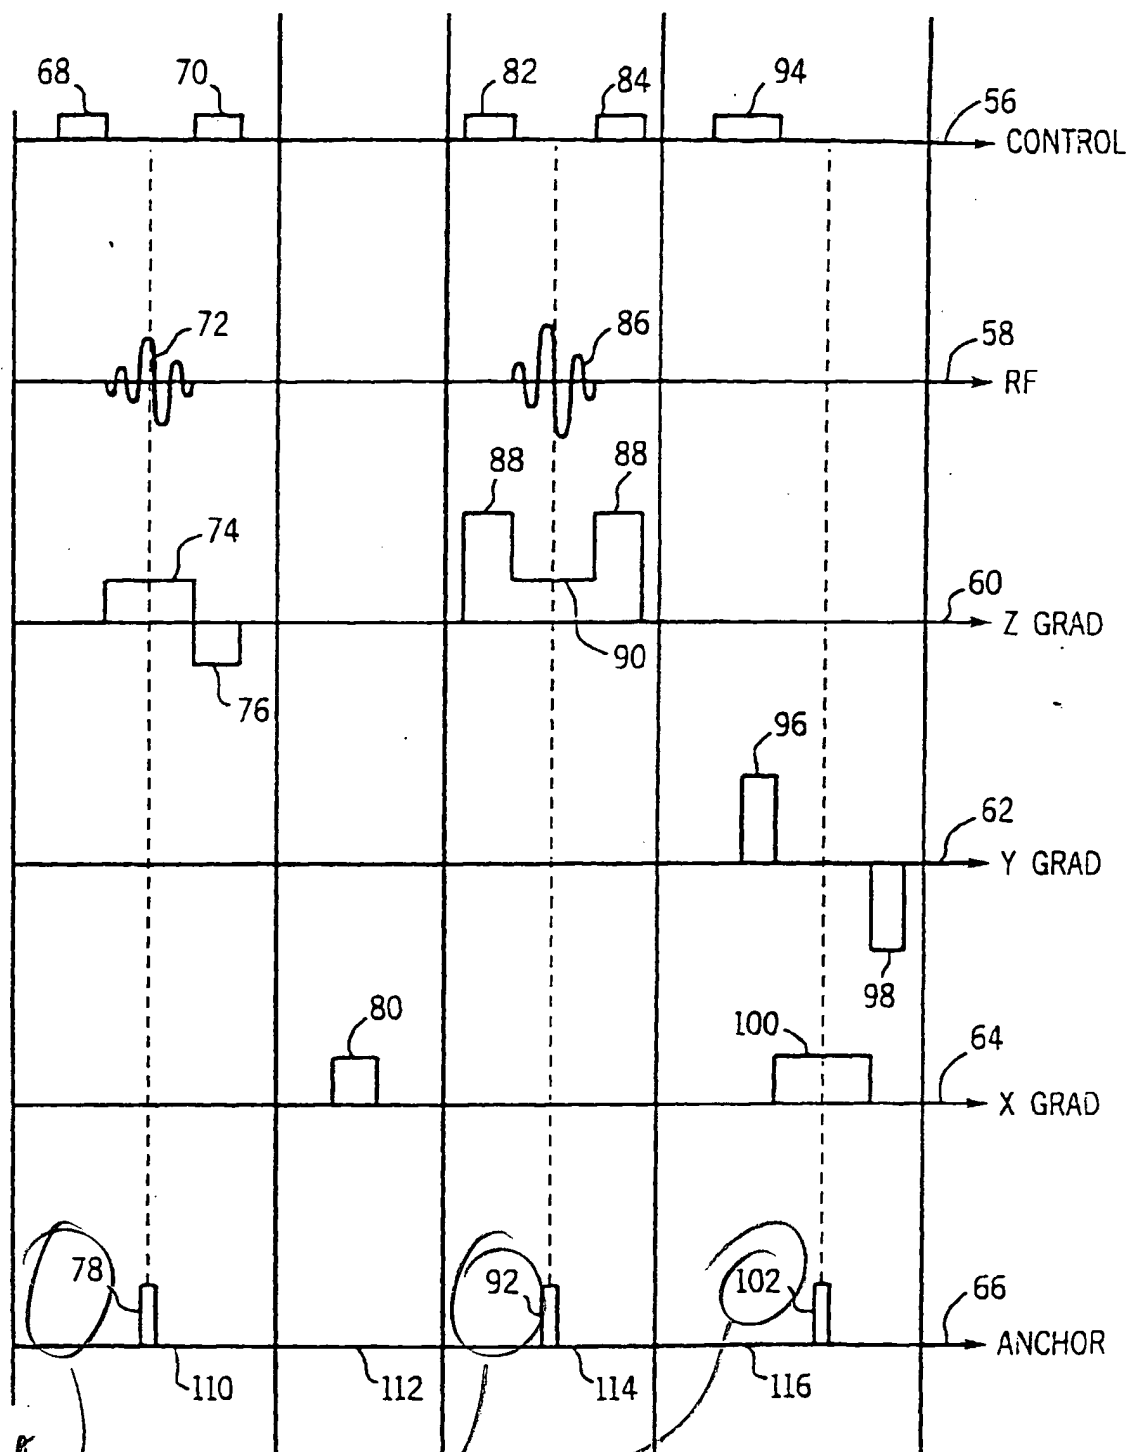

*Time Points*

FIG. 5


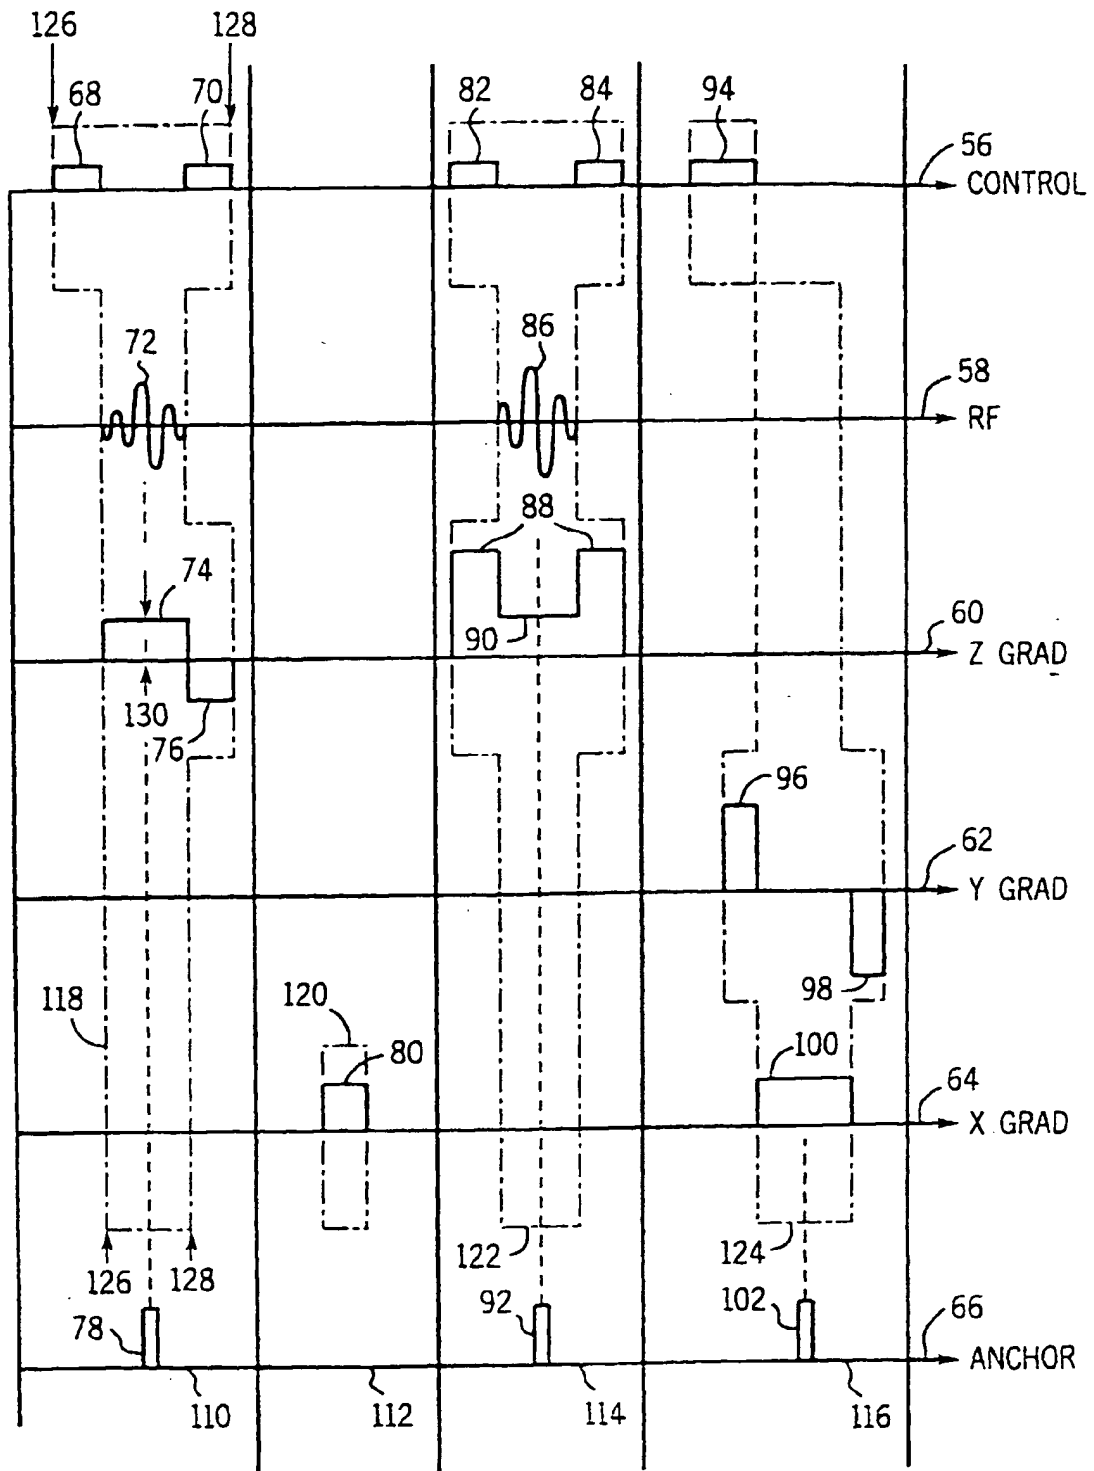


FIG. 6

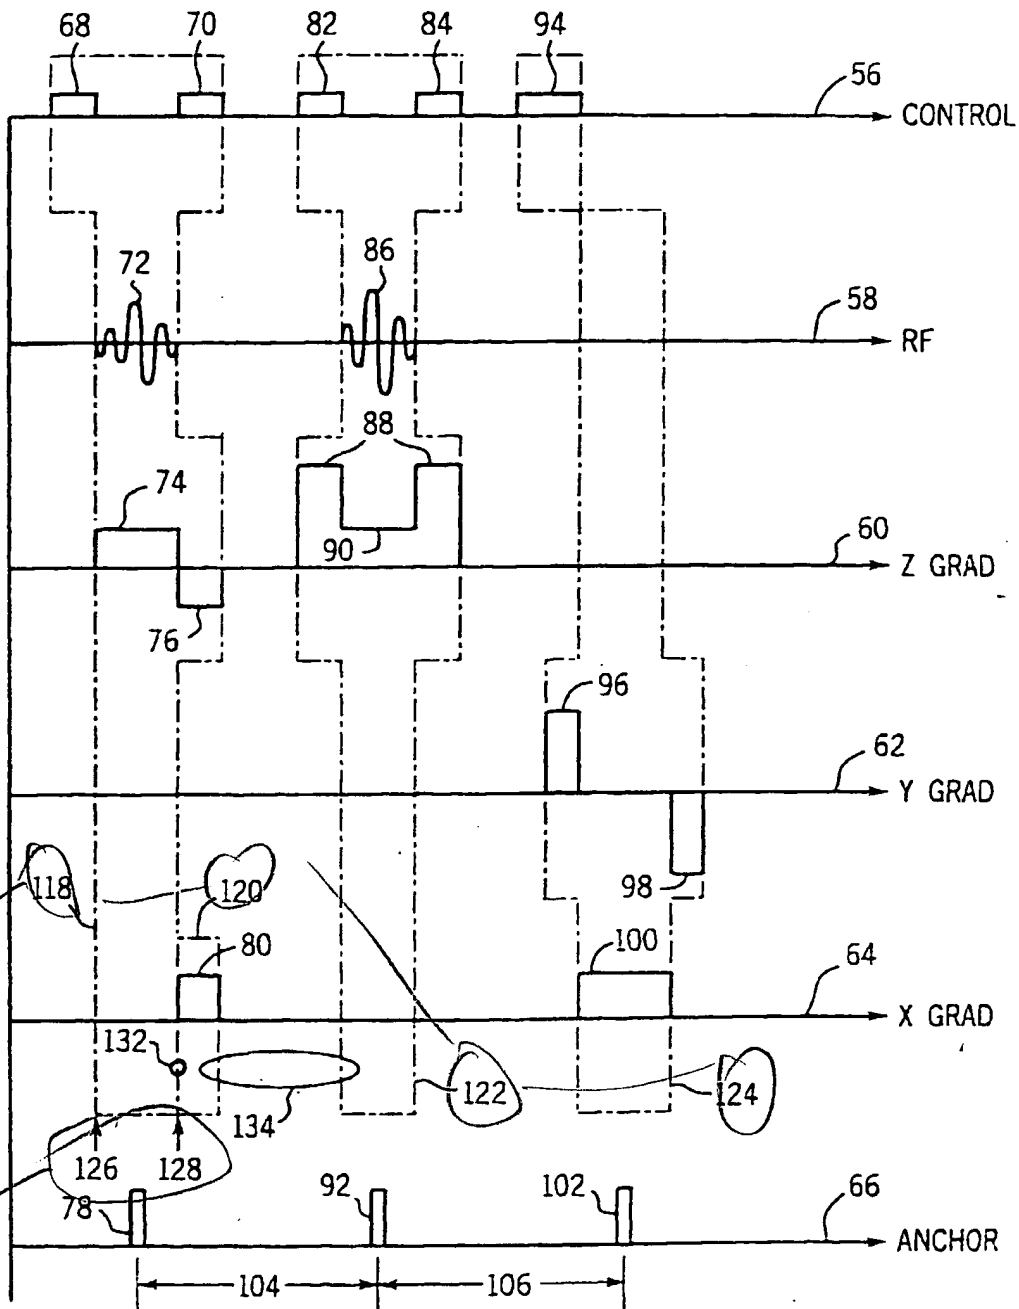

Axis

FIG. 7

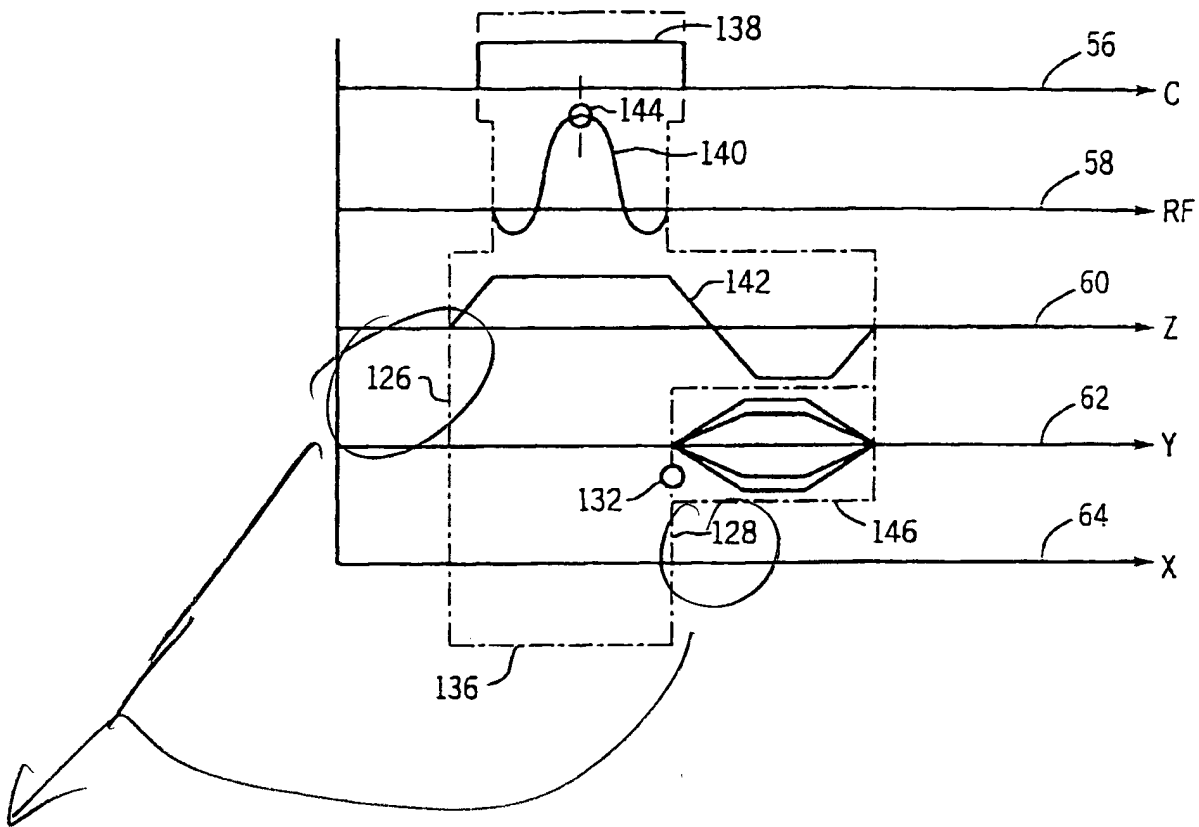


FIG. 8

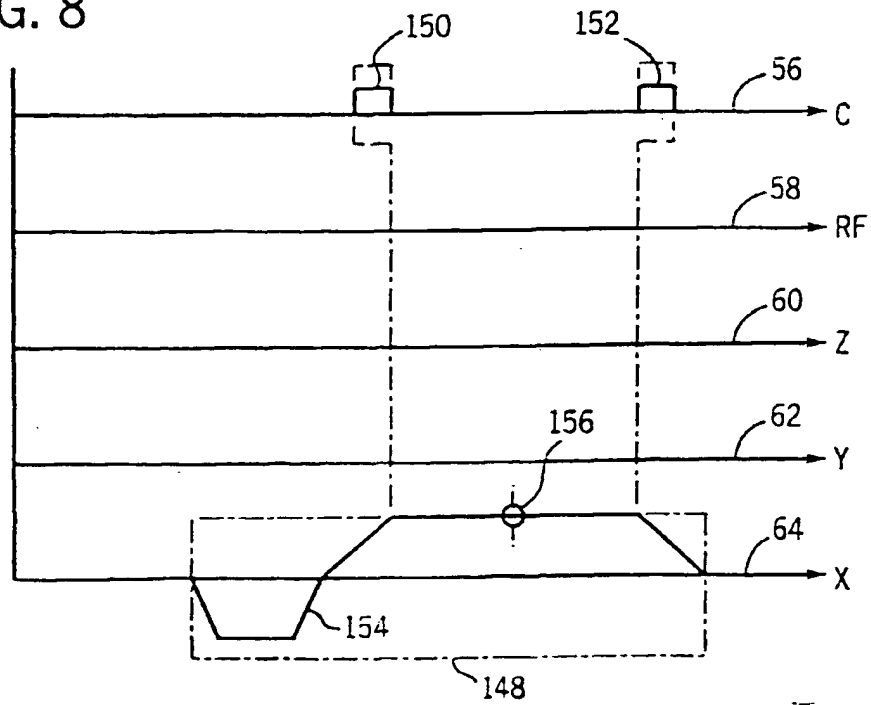


FIG. 9


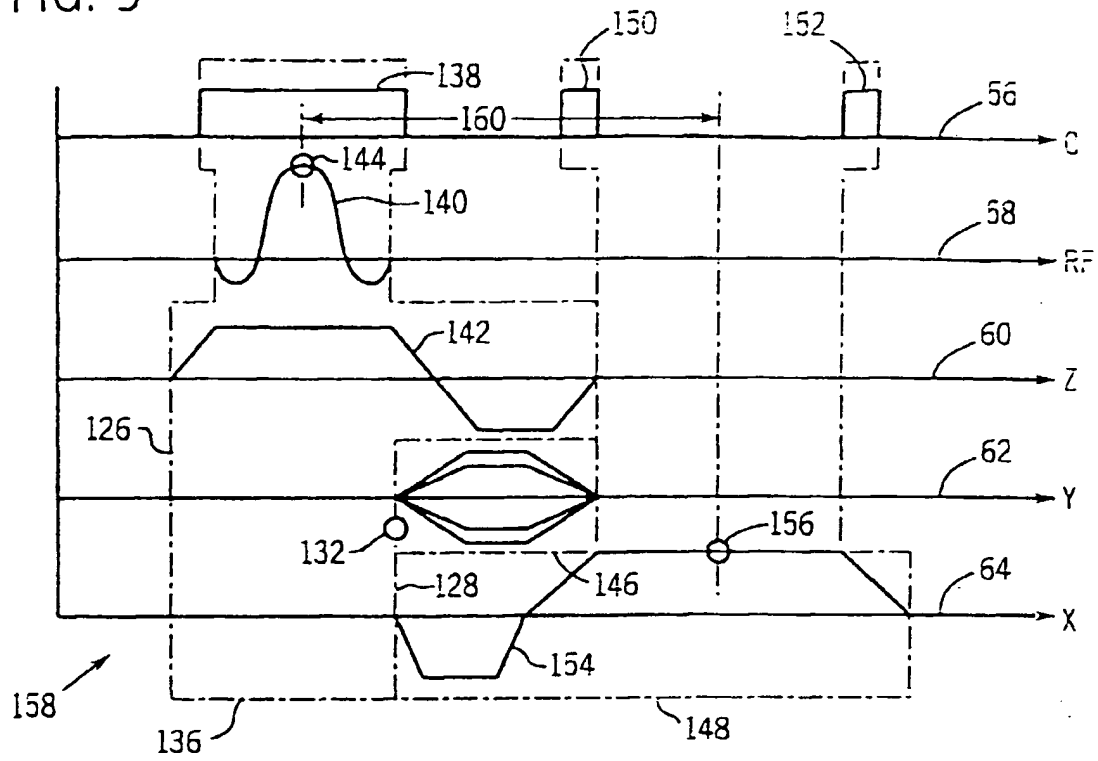


FIG. 10





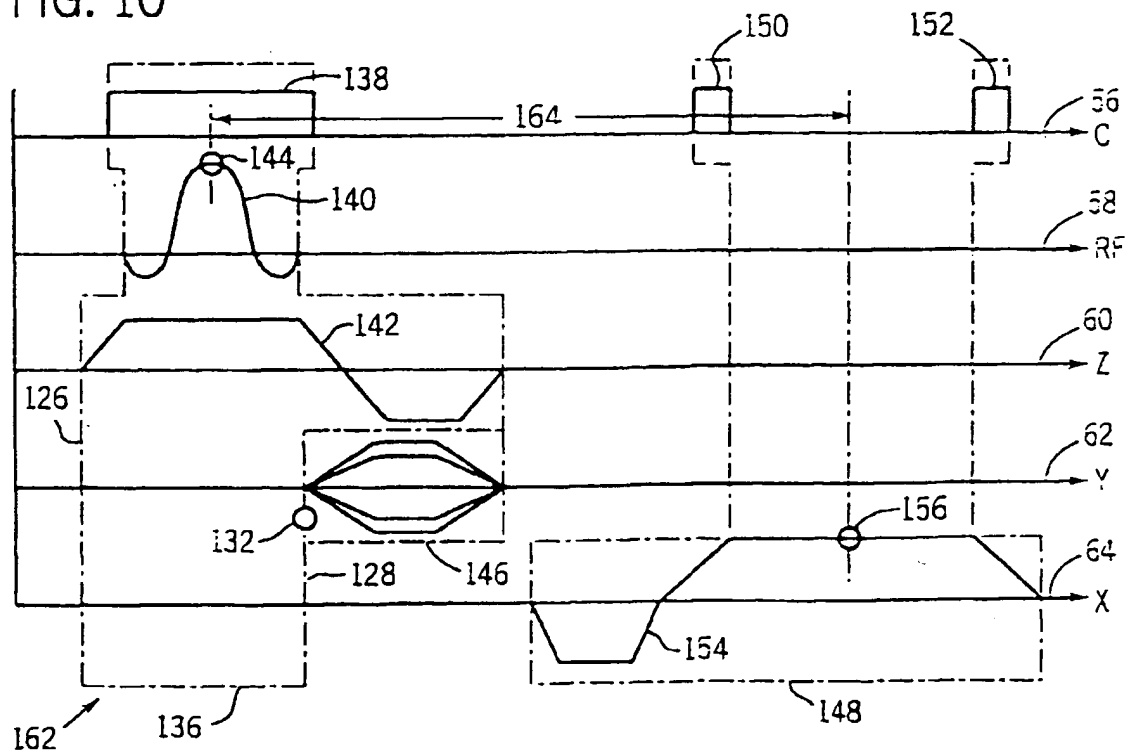

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 974 881 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**24.05.2000 Bulletin 2000/21**

(51) Int Cl.7: **G05B 19/042, G01R 33/54**

(43) Date of publication A2:  
**26.01.2000 Bulletin 2000/04**

(21) Application number: **99305592.0**

(22) Date of filing: **14.07.1999**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- **Tan, Quing**  
Waukesha, Wisconsin 53186 (US)
- **Licato, Paul Edgar**  
Wauwatosa, Wisconsin 53213 (US)
- **Ploetz, Lawrence Edward**  
Brookfield, Wisconsin 53005 (US)

(30) Priority: **22.07.1998 US 120920**

(71) Applicant: **GENERAL ELECTRIC COMPANY**  
**Schenectady, NY 12345 (US)**


(74) Representative: **Pedder, James Cuthbert et al**  
**GE London Patent Operation,**  
**Essex House,**  
**12/13 Essex Street**  
**London WC2R 3AA (GB)**

(72) Inventors:  
• **McKinnon, Graeme Colin**  
**Hartland, Wisconsin 53029 (US)**

(54) **Modular time masking sequence programming for imaging system**

(57) A technique is described for programming multiple axes (56, 58, 60, 62, 64) or channels of a system, such as an MRI system. Modular component time masks (118, 120, 122, 124) are defined including information for activity on at least one axis and a time boundary (126, 128) for execution of the activity. The modular components may be stored in a library, and assembled to define desired control sequences (54). Activity may include pulse sequences for coils (18, 20) in the imaging system. The modular components facilitate definition of complex multi-axis control sequences while respecting inherent physical constraints of the system. Time optimized control sequences (54) may be developed from the modular components by reference to beginning and ending times (126, 128) of a series of components, or to anchor time points (78, 92, 102) associated with the components.

FIG. 5

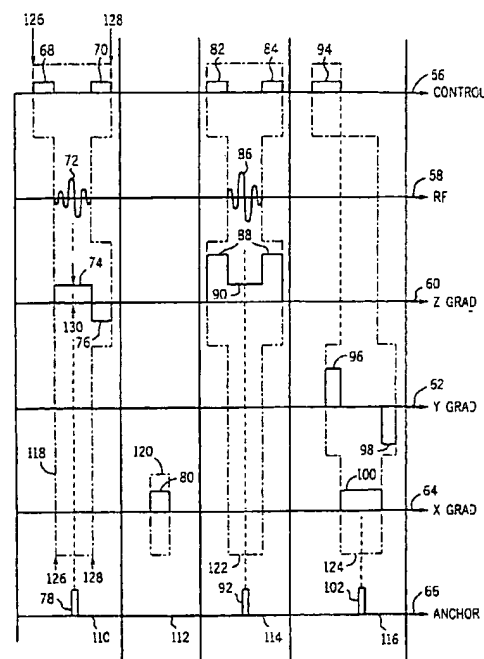

EP 0 974 881 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 5592

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 44 09 176 A (THE REGENTS OF THE UNIVERSITY OF CALIFORNIA) 22 September 1994 (1994-09-22) * page 2, line 6 - page 4, line 38 * * page 5, line 4 - line 63 * * page 6, line 49 - page 8, line 24 *	1-6	605B19/042 601R33/54
X	US 5 068 786 A (Z. NETTER, M. BAR-LEV) 26 November 1991 (1991-11-26) * column 1, line 13 - column 2, line 25 * * column 3, line 28 - column 6, line 65 * * column 7, line 23 - column 9, line 19 *	1-6	
X	US 4 707 661 A (J.C. HOENNINGER III, L.E. CROOKS) 17 November 1987 (1987-11-17) * column 1, line 7 - column 3, line 6 * * column 3, line 40 - column 5, line 53 * * column 7, line 36 - column 11, line 68 *	1-6	
X	US 5 550 846 A (P.E. STAIGER) 27 August 1996 (1996-08-27) * the whole document *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			G01R
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>4 April 2000</b>	Examiner <b>Volmer, W</b>
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1603 (03.02.99) (p.04/01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 5592

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-04-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 4409176	A	22-09-1994	US	5606258 A	25-02-1997
US 5068786	A	26-11-1991	US	4845613 A	04-07-1989
US 4707661	A	17-11-1987	NONE		
US 5550846	A	27-08-1996	EP	0591562 A	13-04-1994
			JP	2721784 B	04-03-1998
			JP	6187131 A	08-07-1994

EPO FORM P0469

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82